
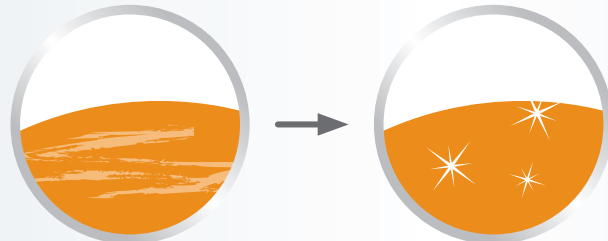
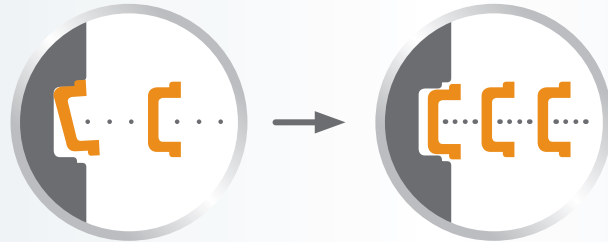


CEVO®-process A-3110

Wax additive for Polyamide

Special one pack for
lubrication and
stabilisation

Includes a synergistic
combination of different
lubricating agents as well
as a balanced mixture of
stabilisers.

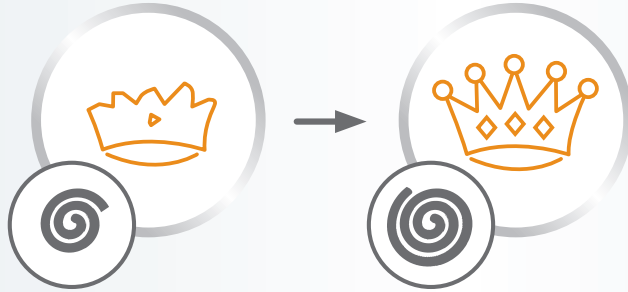

Main advantages:

- **Flow Improvement**
long flow paths can be realized
- **Optimized release**
injected parts can be ejected
more easily and quickly
- **Quality improvement**
avoidance of streaks on surfaces

CEVO®-process A-3110

Delivery Specifications

Characteristics	Unit	Target value	Method
Melting point	°C	> 180	ASTM 3954
Colour	–	white	AA 3.2.1.505
Density	g/cm ³	1.00 – 1.02	Ph. Eur. 2.2.5

Food contact legislation:

Product for technical and food contact applications, detailed information upon request

Physical form: Compactate, powder

Packaging: Paper bag

Facts:

Polymers:

PA6, PA66, PA6/66,
PA66/6 und PA12, blends

Recommended dosage: 0.5 - 0.8 %

Case study



CEVO®-process A-3110

Stable quality of recyclates

A compounder using agglomerate-based and re-milled polyamide was not able to improve and stabilise the volatile quality of his compounds. The raw material was thermally pre-stressed, subject to partial degradation and contained processing-related inhomogeneities. The use of CEVO®-process A-3110 enabled the production of compounds with low variation in mechanical characteristics and consistent processing properties.